





PARTS

(1)x1  Chair Back	(2)x1  Seat	(3)x1  Lift Mechanism	(4)x2  Arm 4A Arm 4B	(5)x1  Base	(6)x5  Caster
(7)x1  Gas Lift Cylinder	(8)x1  Cylinder Cover	(9)x10  M6 x 25 Bolt	(10)x10  M6 x 16 Bolt	(11)x1  Allen Wrench	(12)x1  Dust Cover

STEP 1

STEP 1: Attach Arm 4A and 4B (**Part 4**) to the underside of the Seat (**Part 2**) using 3 M6 x 25 Bolt (**Part 9**) and 3 M6 x 16 Bolt (**Part 10**).


*Note: **TIGHTEN THE BOLTS COMPLETELY.**

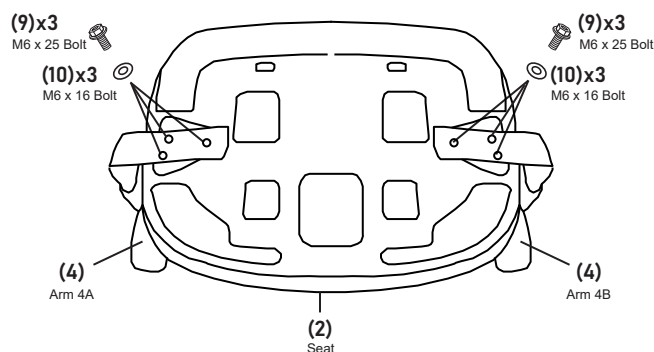

STEP 2


STEP 2: Attach Lift Mechanism (**Part 3**) to the underside of the Seat (**Part 2**) using 4 M6 x 25 Bolt (**Part 9**) and 4 M6 x 16 Bolt (**Part 10**).

*Note: **TIGHTEN THE BOLTS COMPLETELY.**

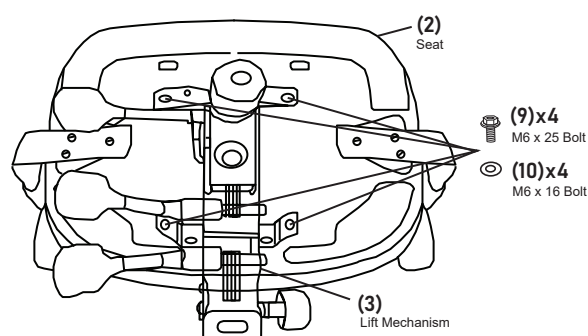

STEP 3


STEP 3A: Place Cylinder Cover (**Part 8**) over Gas Lift Cylinder (**Part 7**) then insert Gas Lift Cylinder (**Part 7**) into the Base (**Part 5**).



Step 3B: Attach Gas Lift Cylinder (**Part 7**) and 5 casters (**Part 6**) into the Base (**Part 5**)


STEP 4

STEP 4: Place Seat (**Part 2**) onto the Gas Lift Cylinder (**Part 7**).

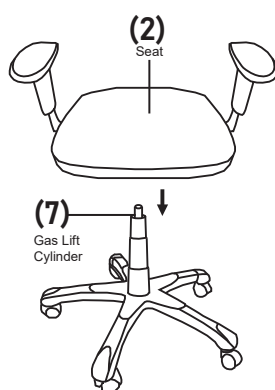

STEP 5

STEP 5A: Assemble the Chair back (**Part 1**) and seat (**Part 2**) as shown below.

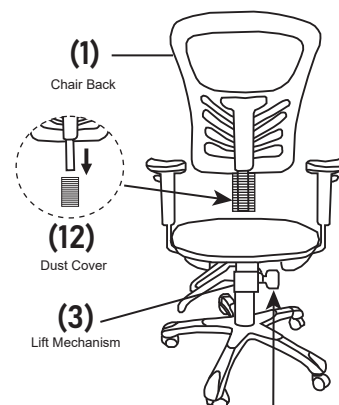

STEP 5B: Insert the Chair back (**Part 1**) into the Lift mechanism (**Part 3**) and adjust to desired height, turn the knob clockwise until it is screwed in tightly.

STEP 6

